

Data sheet

Modul REGplus IP20 light gray unequipped

Page 1/5

P/N

1309427103-E


EAN 4250184136538

2015-26-11

Illustrations



Dimensional drawing

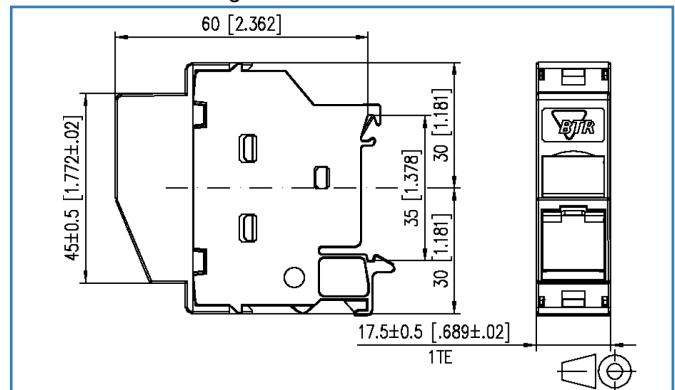

See enlarged drawings at the end of document

Product specification

- unequipped termination unit for mounting on TH35 rail to DIN EN 60715
- for one individual module in Modul design
- variable cable feed 45° from the top or bottom, plug direction 45° downwards
- width of 1HP allows mounting up to 12 REG in standard electrical distribution panels
- when mounted as a device of protection class I, the equipotential bonding is realized directly over the rail by means of an integrated equipotential plate. Special measures have to be taken to integrate the rail in the equipotential bonding of the building.
- a cover protects the device against direct contact. If mounted in distributor panels with protective insulation, protection class II is guaranteed. In this case, it is necessary to remove the equipotential bonding plate.
- integrated dust protection cover (also colored)
- suitable modules for cable access 45° from the top: C6_A modul 180°, E-DAT modul 8(8), E-DAT modul coupler 180°, UAE modul Cat.5e and Cat.6, OpDAT modul LC-D and ST, coax modules and E2000 DC couplers
- suitable modules for cable access 45° from the bottom: C6_A modul 270° and E-DAT modul coupler 90°
- not suitable for modules in Keystone design and C6_A modul 90°!

Modul REGplus IP20 light gray unequipped

P/N

1309427103-E

EAN 4250184136538

2015-26-11

Technical Data

General Data

Fields of application	Harsh environment
Design	Wall outlet
Color	light gray
Dimensions	
Dimension (L x W x H)	60.00 x 17.50 x 60.00 mm
Dimension (L x W x H)	2.36 x 0.69 x 2.36 in.
Horizontal pitch	1 TE
Labeling option	label window with identification label
Marking option	by dust protection

Connections/interfaces

Number of ports interface 1	1
Number of equipped ports interface 1	0
Module plug-in direction	45° downwards
Cable access/outlet	variable, 45° from the top or bottom

Mechanical characteristics

Cut-out	Modul
---------	-------

Materials and material properties

Material - Cover part(s)	Frianyl
Material - Lower housing	Frianyl
Material - Ground connection	CuSn4
Material - Dust protection	ABS
Material - Label window	ABS, transparent

Environmental conditions

Particulate ingress	IP2X
Liquid ingress/immersion	IPX0

Data sheet

Page 3/5

Modul REGplus IP20 light gray unequipped

P/N

1309427103-E

EAN 4250184136538

2015-26-11

Technical Data

Approvals

RoHS	compliant
UL listed (file no.)	DUXR.E178484

Classifications

ETIM 5.0	EC001024
----------	----------

Packing details

Type of packaging	10 pc(s) / box
Packaging unit - Weight (gram)	286.00 g
Packaging unit - Weight (pound)	0.63 lb
Packaging dimension (W x H x D)	235.00 x 165.00 x 135.00 mm
Packaging dimension (W x H x D)	9.25 x 6.50 x 5.31 in.



Modul REGplus IP20 light gray unequipped

P/N

1309427103-E

EAN 4250184136538

2015-26-11

Accessories

P/N	Designation
816979-0105-I	Dust protection covers for Modul patch panels subway / REG yellow
816979-0106-I	Dust protection covers for Modul patch panels subway / REG blue
816979-0107-I	Dust protection covers for Modul patch panels subway / REG green
816979-0108-I	Dust protection covers for Modul patch panels subway / REG red
899011-01	Label sheet for Modul patch panels / REG



Data sheet
Modul REGplus IP20 light gray unequipped


Page 5/5

P/N
 1309427103-E
 EAN 4250184136538

2015-26-11

Illustrations

Dimensional drawing

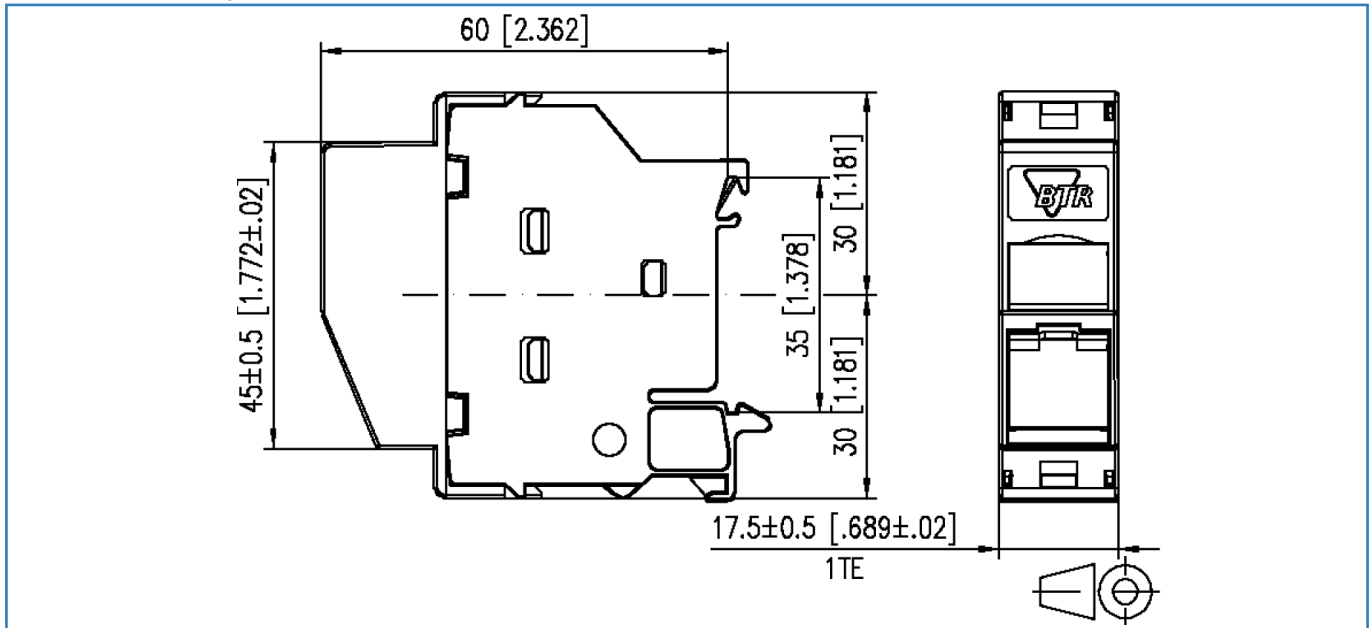

© 2015 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!