



## 15W Single Output Industrial DIN Rail Power Supply

## DR-15 series



## ■ Features :

- Universal AC input/Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- Isolation class II
- LED indicator for power on
- No load power consumption < 0.5W
- 100% full load burn-in test
- 3 years warranty



## SPECIFICATION

MODEL	DR-15-5	DR-15-12	DR-15-15	DR-15-24	
OUTPUT	DC VOLTAGE	5V	12V	15V	24V
	RATED CURRENT	2.4A	1.25A	1A	0.63A
	CURRENT RANGE	0 ~ 2.4A	0 ~ 1.25A	0 ~ 1A	0 ~ 0.63A
	RATED POWER	12W	15W	15W	15.2W
	RIPPLE & NOISE (max.) Note.2	80mVp-p	120mVp-p	120mVp-p	150mVp-p
	VOLTAGE ADJ. RANGE	4.75 ~ 5.5V	10.8 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 26.4V
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±1.0%	±1.0%	±1.0%	±1.0%
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±1.0%
	SETUP, RISE TIME	1000ms, 50ms/230VAC	1000ms, 50ms/115VAC at full load		
HOLD UP TIME (Typ.)	70ms/230VAC	16ms/115VAC at full load			
INPUT	VOLTAGE RANGE	85 ~ 264VAC	120 ~ 370VDC		
	FREQUENCY RANGE	47 ~ 63Hz			
	EFFICIENCY (Typ.)	77%	84%	83.5%	85%
	AC CURRENT (Typ.)	0.88A/115VAC	0.48A/230VAC		
	INRUSH CURRENT (Typ.)	COLD START 35A/115VAC	65A/230VAC		
PROTECTION	OVERLOAD Note.5	105 ~ 160% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed			
	OVER VOLTAGE	5.75 ~ 6.75V	13.8 ~ 16.2V	17.25 ~ 20.25V	27.6 ~ 32.4V
ENVIRONMENT	WORKING TEMP.	-20 ~ +60°C (Refer to output load derating curve)			
	WORKING HUMIDITY	20 ~ 90% RH non-condensing			
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH			
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)			
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6			
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 approved, design refer to EN50178			
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC			
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH			
	EMI CONDUCTION & RADIATION	Compliance to EN55011, EN55022 (CISPR22), EN61204-3 Class B			
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3			
OTHERS	EMS IMMUNITY	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, ENV50204, EN55024, EN61000-6-2, EN61204-3, heavy industry level, criteria A			
	MTBF	1172.3K hrs min. MIL-HDBK-217F (25°C)			
	DIMENSION	25*93*56mm (W*H*D)			
NOTE	PACKING	0.1Kg; 140pcs/15Kg/0.92CUFT			
	NOTE	<ol style="list-style-type: none"> <li>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>3. Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.</li> <li>5. Constant current operation region is within 60% ~100% rated output voltage. Protection type for short circuit is hiccup mode and will recover automatically after fault condition is removed.</li> </ol>			

File Name:DR-15-SPEC 2009-03-09






15W Single Output Industrial DIN Rail Power Supply

DR-15 series


■ Mechanical Specification

Case No.985A Unit:mm

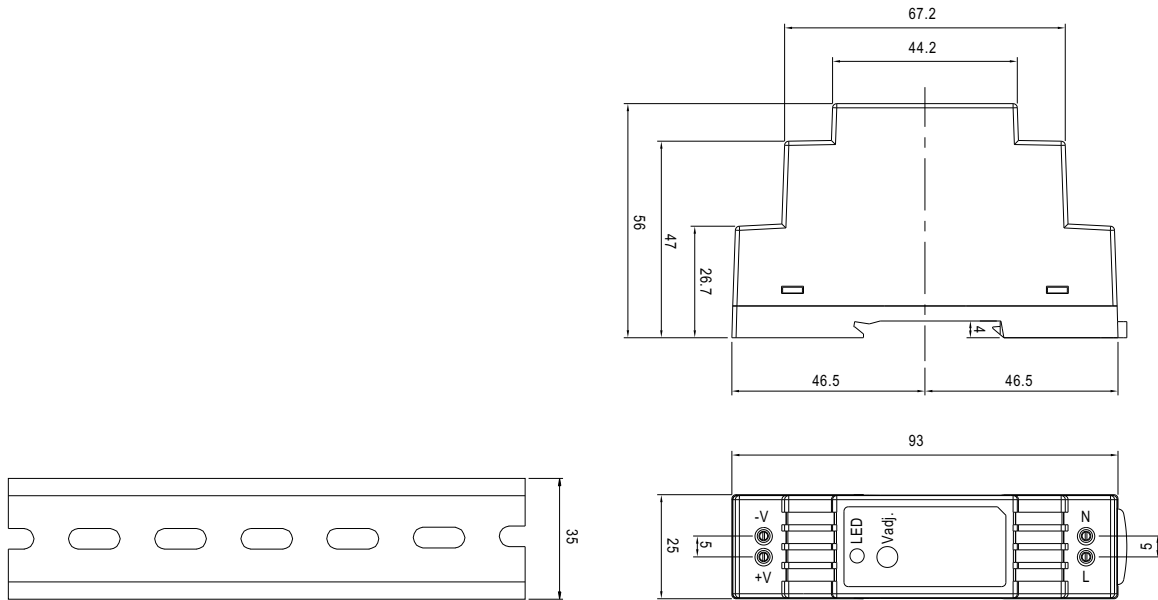


ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15


■ Block Diagram

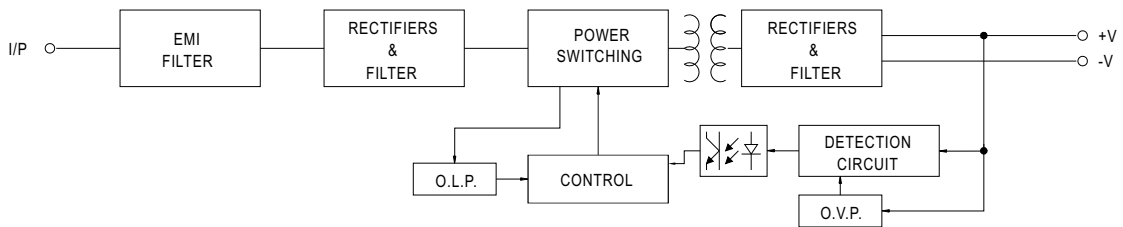

■ Derating Curve

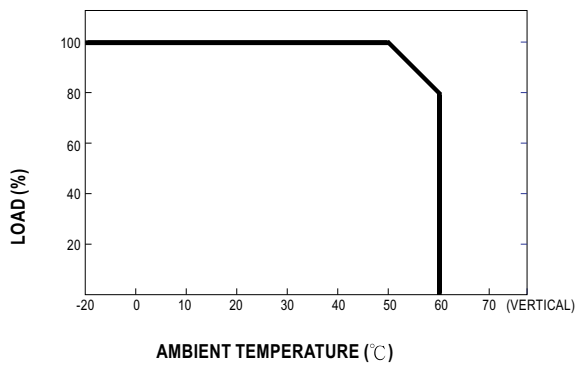

■ Output Derating VS Input Voltage

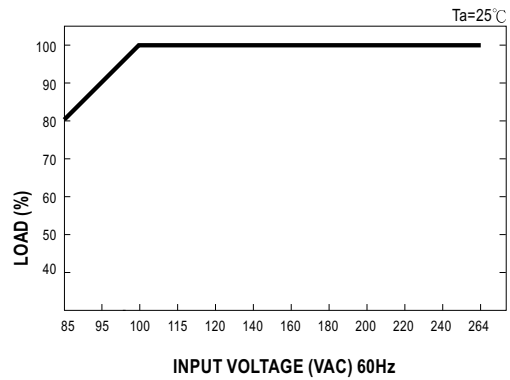

File Name:DR-15-SPEC 2009-03-09



## We are here for you. Addresses and Contacts

### Sales Switzerland & Liechtenstein

Matthias Rüegg  
Ruhbergstrasse 32  
CH-9230 Flawil

Phone +41 44 877 35 18  
Mobile+41 76 491 66 66  
Fax +41 44 877 35 19

matthias.rueegg@pewatron.com

### Sales International Key Accounts

Peter Felder  
Thurgauerstrasse 66  
CH-8052 Zürich

Phone +41 44 877 35 05  
Mobile+41 79 406 49 83  
Fax +41 44 877 35 25

peter.felder@pewatron.com

### Sales Germany

Postcode 60000–79999

Dieter Hirthe  
Mühlweg 23  
D-71554 Weissach i.T.

Phone +49 719 149 60 58  
Mobile+49 163 762 74 30  
Fax +49 719 193 31 88

dieter.hirthe@pewatron.com

Postcode 10000–59999  
Postcode 80000–99999

Kurt Stritzelberger  
Neumarkter Str. 86a  
D-81673 Munich

Phone +49 89 260 38 47  
Mobile+49 171 803 41 35  
Fax +49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

Key Accounts  
Aerospace and Defence

Claus Wübbena  
Vogelkamp 26  
D-26655 Westerstede

Phone +49 4488 5204 614  
Mobile+49 173 9700 691  
Fax +49 4488 5204 616

claus.wuebbena@pewatron.com

### Sales Austria

Kurt Stritzelberger  
Neumarkter Str. 86a  
D-81673 Munich

Phone +49 89 260 38 47  
Mobile+49 17 18 03 41 35  
Fax +49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

### Sales Other Countries / Product Management

#### Sensors

Physical Sensors  
Data Acquisition

Thomas Clausen  
Phone +41 44 877 35 13  
thomas.clausen@pewatron.com

Geometrical Sensors

Eric Letsch  
Phone +41 44 877 35 14  
eric.letsch@pewatron.com

#### Power Supplies

DC-DC Converters  
Switching Power Supplies  
DC-AC Inverters

Sebastiano Leggio  
Phone +41 44 877 35 06  
sebastiano.leggio@pewatron.com

#### E-Components

Current Sensors  
Man Machine Interface  
Measurement Probes

Sebastiano Leggio  
Phone +41 44 877 35 06  
sebastiano.leggio@pewatron.com

PEWATRON AG  
Thurgauerstrasse 66  
CH-8052 Zurich

Phone +41 44 877 35 00  
Fax +41 44 877 35 25

www.pewatron.com  
info@pewatron.com