

Data Sheet

Subject to technical alteration
Issue date: 04.08.2015



Application

Cable sensor for temperature measurement for HVAC applications. In conjunction with a Thermowell pocket suitable temperature measurement in immersion temperature applications. Designed for control and monitoring applications.

Types Available

TF25	Sensor	passive, with sensor acc. to customer's need*
	TRA	active, 4..20 mA
	TRV	active, 0..10 V

* eg: PT100/PT1000/Ni1000/Ni1000TK5000/LM235Z/NTC.../PTC... and other sensors on request.

Security Advice – Caution



The installation and assembly of electrical equipment should only be performed by authorized personnel.

The product should only be used for the intended application. Unauthorised modifications are prohibited! The product must not be used in relation with any equipment that in case of failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

Notes on Disposal



The product is considered electrical and electronic waste and must be disposed accordingly. Special treatment for specific components may be legally binding or ecologically sensible. The local and current applicable legislation must be followed.

General remarks concerning sensors

Especially with regard to passive sensors in 2-wire conductor versions, the wire resistance of the supply wire has to be considered. If necessary the wire resistance has to be compensated by the follow-up electronics. Due to self-heating, the wire current affects the measurement accuracy. So it should not exceed 1 mA.

When using lengthy connection wires (depending on the cross section used) the measuring result might be falsified due to a voltage drop at the common GND-wire (caused by the voltage current and the line resistance). In this case, 2 GND-wires must be wired to the sensor - one for supply voltage and one for the measuring current.

Sensing devices with transducer should always be operated in the middle of the measuring range to avoid deviations at the measuring end points. The ambient temperature of the transducer electronics should be kept constant. The transducers must be operated at a constant supply voltage ($\pm 0,2$ V). When switching the supply voltage on/off, onsite power surges must be avoided.

Build-up of Self-Heating by Electrical Dissipative Power

Temperature sensors with electronic components always have a dissipative power, which affects the temperature measurement of the ambient air. The dissipation in active temperature sensors shows a linear increase with rising operating voltage. This dissipative power has to be considered when measuring temperature. In case of a fixed operating voltage ($\pm 0,2$ V) this is normally done by adding or reducing a constant offset value. As Thermokon transducers work with a variable operating voltage, only one operating voltage can be taken into consideration, for reasons of production engineering. Transducers 0..10 V / 4..20 mA have a standard setting at an operating voltage of 24 V =. That means, that at this voltage, the expected measuring error of the output signal will be the least. For other operating voltages, the offset error will be increased by a changing power loss of the sensor electronics. If a re-calibration should become necessary later directly on the sensor, this can be done by means of a trimming potentiometer on the sensor board.

Remark: Occurring draft leads to a better carrying-off of dissipative power at the sensor. Thus temporally limited fluctuations might occur upon temperature measurement.

Technical Data

Measuring values		temperature
Output voltage	TRV	0..10 V, min. load 5 k Ω
Output Amp	TRA	4..20 mA, max. load 500 Ω
Power supply	TRV	15..24 V = ($\pm 10\%$) or 24 V ~ ($\pm 10\%$)
	TRA	15..24 V = ($\pm 10\%$)
Power consumption	TRV	max. 0,45 W (24 V =) 0,8 VA (24 V ~)
	TRA	max. 0,5 W (24 V =)
Measuring range temp	passive	depending on used sensor
	TRV1/TRA1	-50..+50 $^{\circ}$ C
	TRV2/TRA2	-10..+120 $^{\circ}$ C
	TRV3/TRA3	0..+50 $^{\circ}$ C
	TRV4/TRA4	0..+160 $^{\circ}$ C
	TRV8/TRA8	-15..+35 $^{\circ}$ C
Working range temp	passive	depending on used sensor, 400 $^{\circ}$ C (optional)
	active	-50..160 $^{\circ}$ C
Accuracy temperature	passive	depending on used sensor
	active	$\pm 1\%$ of measuring range (typ. at 21 $^{\circ}$ C), with cable max. 2 m
Sensor	passive	2-wire (standard), 3-wire oder 4-wire sensor cable 1 2 4 6 m
Enclosure	active	PA6.6, white, with quick lock screws
Protection	Enclosure	IP65 according to EN 60529
	Sensor	IP54 according to EN 60529, hexagon pressed IP67 according to EN 60529, rolling with SI-Protection
Cable entry	active	M20 for cable with max. $\varnothing=8$ mm
Connection electrical		terminal block, max. 1,5 mm ²
Pocket		stainless steel Mat. 1.4571, $\varnothing=6$ mm, mounting length 50 100 150 200 250 mm
Ambient condition		-35..+70 $^{\circ}$ C, max. 85% rH non-condensing
Weight	passive	30 g
	TRV TRA	145 g
Notes	passive	cable ends with conductor sleeves as standard, additional probe and cable lengths on request,
	TF25 400 $^{\circ}$ C	sensor cable 2 m, mounting length 50 mm

Mounting Advice


Depending on the application, the cable temperature sensor is assembled to the air duct by means of a mounting flange respectively a clamp screw joint.

Operation of the sensor with an immersion pocket: Use contact fluid for better heat transfer between sensor and measuring medium.


When using our sensing elements in moist rooms or for purposes in refrigeration technology, we recommend to use version IP67.

Please also note the general remarks in our INFORMATION SHEET THK.

Connection Plan

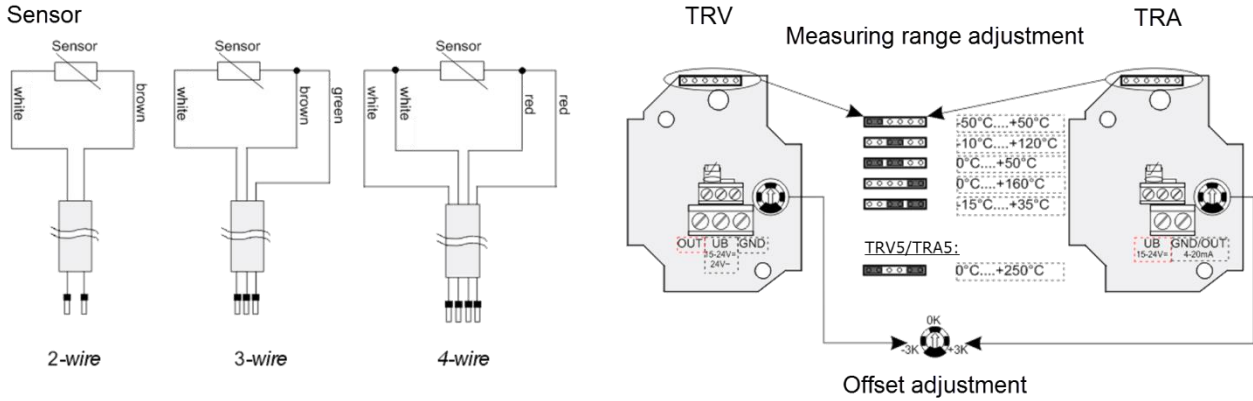

Dimensions (mm)

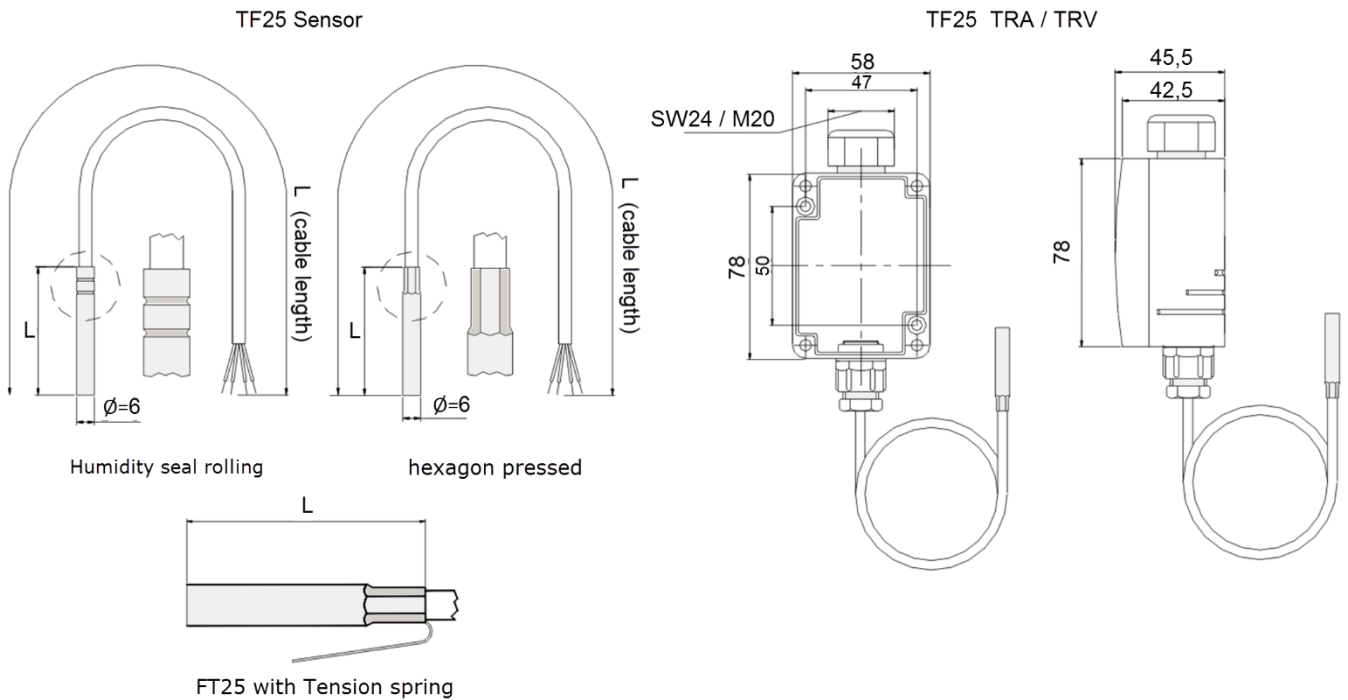

Accessories (optional)

Mounting flange MF6 (brass)	Item No. 3407
Mounting flange MF7 flexible (incl. inserts for $\varnothing=4\text{mm} / 6\text{mm}$)	Item No. 399098
Compression fittings G 1/4" for $\varnothing=6\text{ mm}$ with cutting ring VA, stainless steel	Item No. 103213
<u>Immersion pocket brass</u>	
THMSDS50, Length: 50 mm, for mounting length 50 mm	Item No. 247368
THMSDS100, Length: 100 mm, for mounting length 100 mm	Item No. 247399
THMSDS200, Length: 200 mm, for mounting length 200 mm	Item No. 247405
<u>Immersion pocket stainless steel</u>	
THVADS50, Length: 50 mm, for mounting length 50 mm	Item No. 447393
THVADS100, Length: 100 mm, for mounting length 100 mm	Item No. 447409
THVADS200, Length: 200 mm, for mounting length 200 mm	Item No. 447423