

# LK+ VOC LCD

Duct sensor for air quality, temperature and humidity (optional)

**thermokon**<sup>®</sup>  
HOME OF SENSOR TECHNOLOGY

## Datasheet

Subject to technical alteration  
Issue date: 29.05.2017



## Application

Duct air quality sensor for detection of VOC air quality, and optional humidity combined in one unit. Designed for duct mounted applications with up to 3 0..10 V outputs. The sensor consists of a transmitter with VOC sensor, based on a heated tin oxide semiconductor. LCD models with RGB background light have a transparent cover. Display configuration and threshold values for color changes can be parameterized via Thermokon USEapp. With the option board relay two-point controllers or a 2-stage 2-point controller for temperature or humidity can be realized.

## Types Available

**Duct sensor with display VOC + temp + rH (opt.) – active 2x/3x 0..10 V | 2x 4..20 mA**

LK+ VOC LCD VV  
LK+ VOC LCD AA  
LK+ VOC LCD 3xV

**Duct sensor with display VOC + temp – active 2x 0..10 V + relay**

LK+ VOC LCD VV Relay

Options: additional passive temperature sensor

eg: PT100/PT1000/Ni1000/Ni1000TK5000/NTC10K... and other sensors on request.

## Security Advice – Caution



The installation and assembly of electrical equipment should only be performed by authorized personnel.

The product should only be used for the intended application. Unauthorised modifications are prohibited! The product must not be used in relation with any equipment that in case of a failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

## Notes on Disposal



As a component of a large-scale fixed installation, Thermokon products are intended to be used permanently as part of a building or a structure at a pre-defined and dedicated location, hence the Waste Electrical and Electronic Act (WEEE) is not applicable. However, most of the products may contain valuable materials that should be recycled and not disposed of as domestic waste. Please note the relevant regulations for local disposal.

## Build-up of Self-Heating by Electrical Dissipative Power

Temperature sensors with electronic components always have a dissipative power, which affects the temperature measurement of the ambient air. The dissipation in active temperature sensors shows a linear increase with rising operating voltage. This dissipative power has to be considered when measuring temperature. In case of a fixed operating voltage ( $\pm 0,2$  V) this is normally done by adding or reducing a constant offset value. As Thermokon transducers work with a variable operating voltage, only one operating voltage can be taken into consideration, for reasons of production engineering. Transducers 0..10 V / 4..20 mA have a standard setting at an operating voltage of 24 V =. That means, that at this voltage, the expected measuring error of the output signal will be the least. For other operating voltages, the offset error will be increased by a changing power loss of the sensor electronics. If a re-calibration should become necessary later directly on the sensor, this can be done by means of a trimming potentiometer on the sensor board.


**Remark: Occurring draft leads to a better carrying-off of dissipative power at the sensor. Thus temporally limited fluctuations might occur upon temperature measurement.**

## Technical Data


|                          |                          |   |
|--------------------------|--------------------------|---|
| Measuring values         |                          | VOC, temperature + humidity (depending on the device)   |
| Output voltage           |                          | 1..3x 0..10 V or 0..5 V, min. load 10 k $\Omega$<br>(live-zero configuration via Thermokon USEapp)  |
| Output Amp               | AA                       | 2x 4..20 mA, max. load 500 $\Omega$   |
| Output switch contact    | Relay                    | 2 floating contacts for 24 V ~ or 24 V = / 3 A  |
| Power supply             | AA                       | 15..35 V = or 19..29 V ~,<br>15..35 V =   |
| Power consumption        |                          | max. 2,5 W (24 V =)   max. 4,3 VA (24 V ~)  |
| Measuring range temp.    |                          | 0..+50 °C (default setting), optionally configured via Thermokon USEapp   |
| Measuring range humidity | 3xV                      | 0..100% rH non-condensing, optionally configured via Thermokon USEapp<br>(enthalpy, absolute humidity, dew point)                                   |
| Accuracy temperature     | VV   AA   3xV<br>passive | $\pm 0,5$ K (typ. at 21 °C)<br>typ. $\pm 0,3$ K (typ. at 21 °C), depending on used sensor   |
| Accuracy humidity        | 3xV                      | $\pm 2\%$ between 10..90% rH (typ. at 21 °C)  |
| Air speed                |                          | min. 0,3 m/s, max. 12 m/s   |
| Calibration              |                          | self-calibration  |
| Sensor                   |                          | VOC sensor (heated metal oxide semiconductor)   |
| Display                  |                          | LCD 29x35 mm with RGB backlight   |
| Enclosure                |                          | enclosure USE-M, PC, pure white, cover PC, transparent, with removable cable entry  |
| Protection               |                          | IP65 according to EN 60529  |
| Cable entry              | VV   AA<br>Relay   3xV   | M16, for wire max. $\varnothing=8$ mm<br>M20, for wire max. $\varnothing=10$ mm, seal insert for double cable entry for wire max $\varnothing=6$ mm |
| Connection electrical    |                          | removeable plug-in terminal, max. 2,5 mm <sup>2</sup>   |
| Pipe                     |                          | PA6, black, $\varnothing=19,5$ mm, length 180 mm  |
| Ambient condition        |                          | 0..+50 °C, max. 85% rH short term condensation  |
| Mounting                 |                          | installation is also possible using mounting base   |

## Mounting Advices

The sensor can be mounted on the ventilation duct by means of the mounting flange MF20 TPO (optional with mounting base). Align the openings on the sensor tube according to the flow direction.

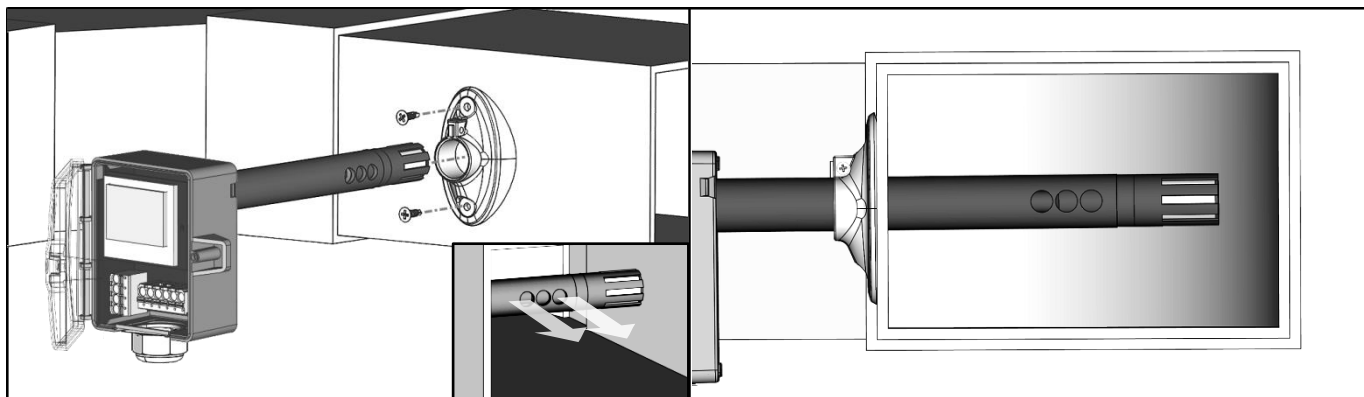


optional:

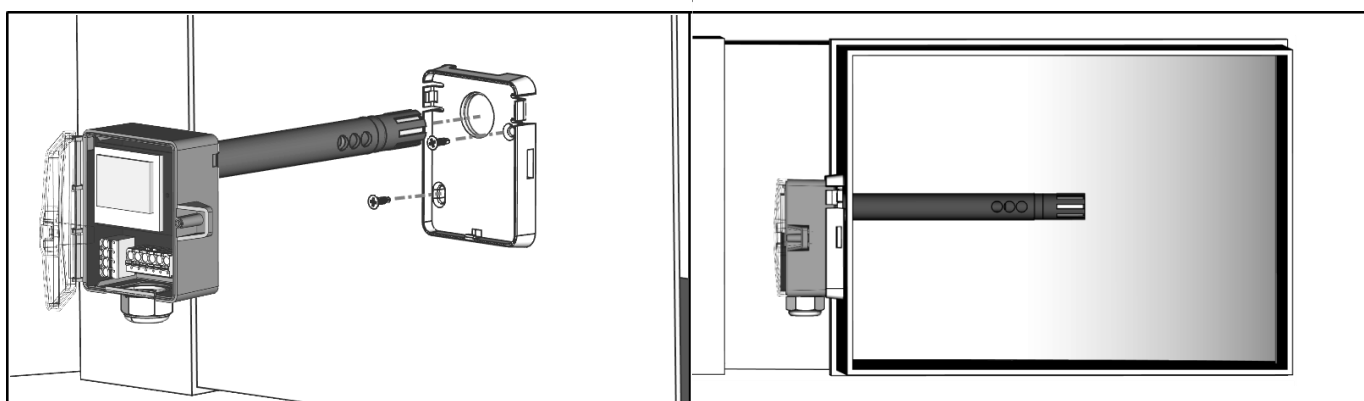


## Connection Plan

To change the output voltage range (default 0..10 V to 0..5 V) via jumper, the display must be removed from the board first.


### LK+ VOC LCD VV

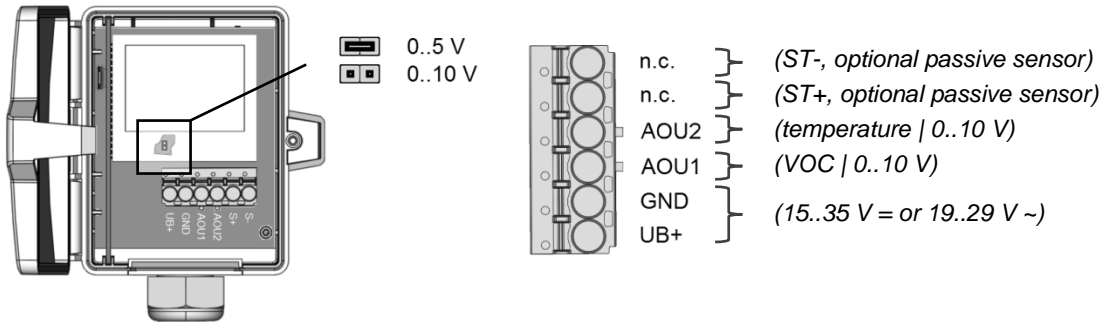


### LK+ VOC LCD AA

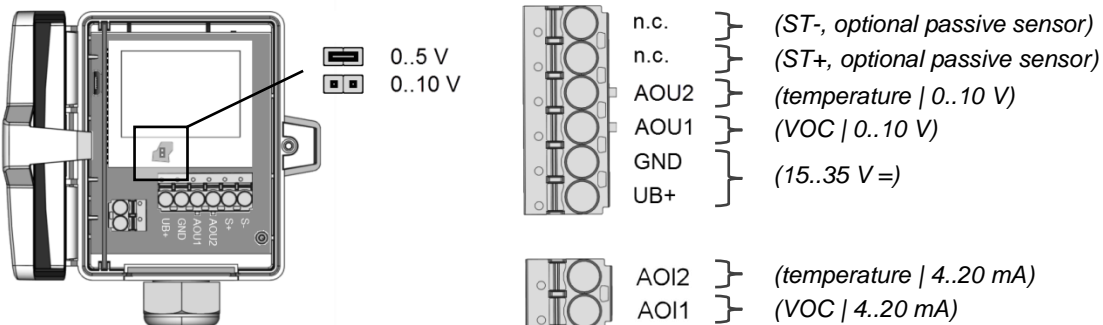


### LK+ VOC 3xV

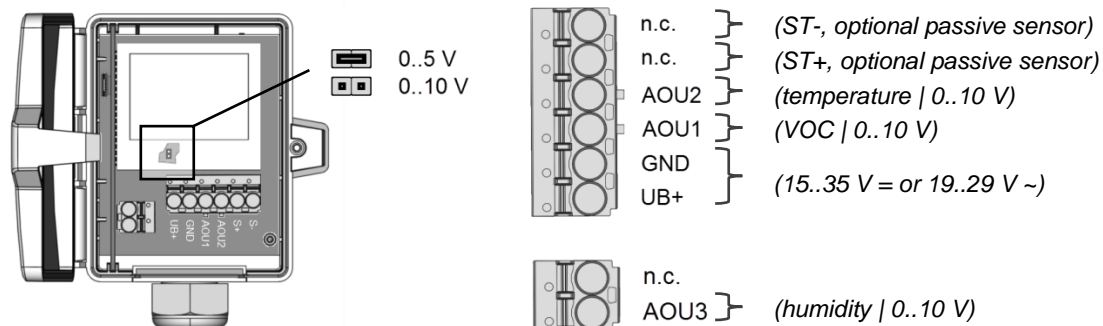

### LK+ VOC Relay

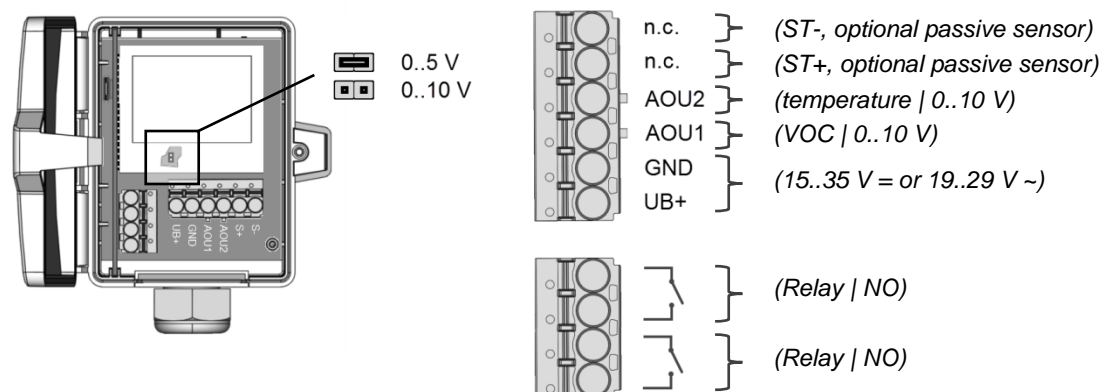

## Configuration



The Thermokon bluetooth dongle with micro-USB is required for communication between USEapp and USE-M / USE L (Item No.: 668262). Commercial bluetooth dongles are not compatible.

Application-specific reconfiguration of the devices can be carried out using the Thermokon USEapp. The configuration is carried out in the voltage-supplied state.




The configuration-app and the app description can be found in the download area of our webpage.


→ [Download \(APK-file for Android\)](#)

## Dismounting Advices

Remove the lower section of the sensor carefully and pulling straight out. **Pay close attention to the correct dismantling of the component!**



## Dimensions (mm)

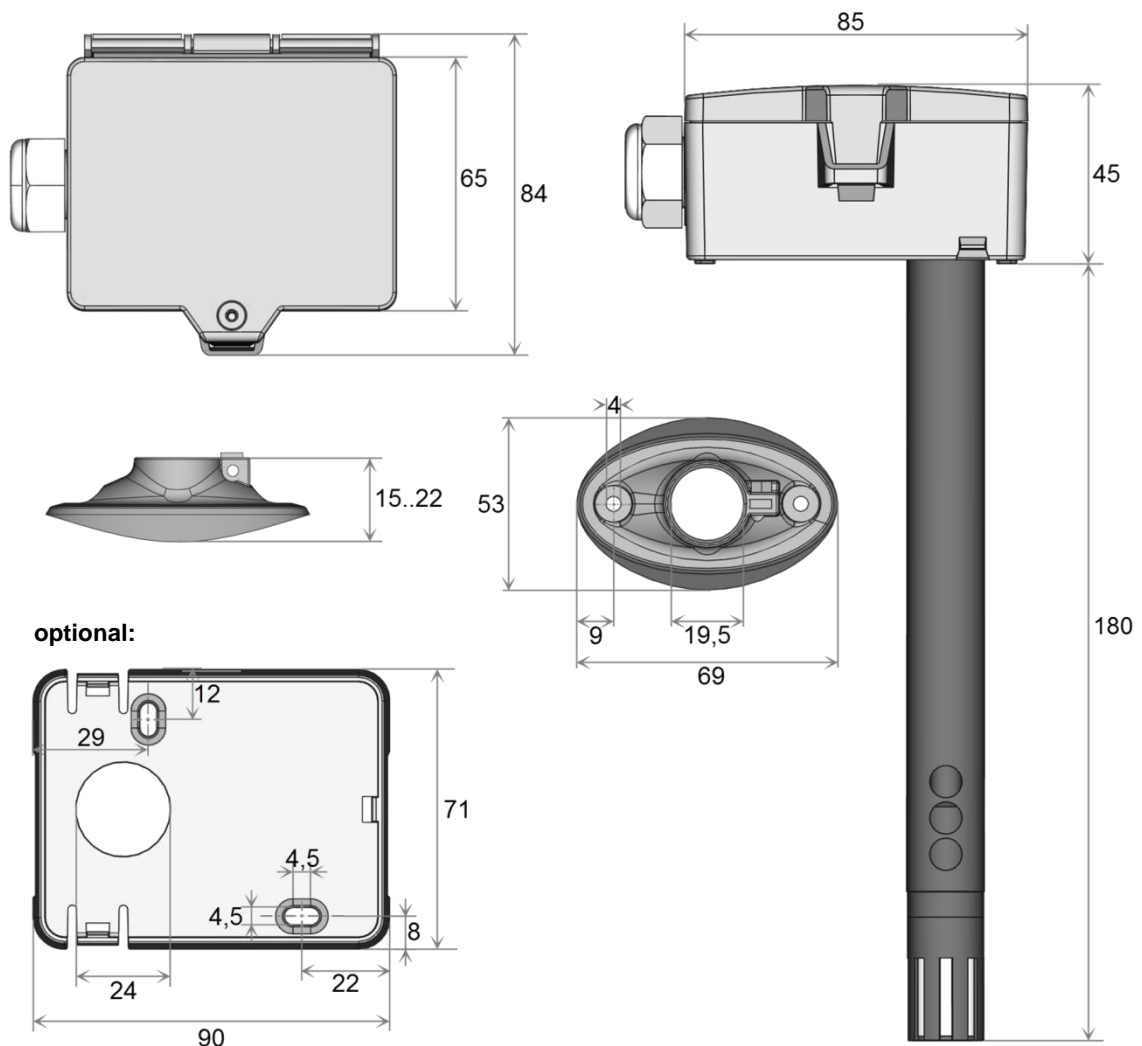

## Accessories (included in delivery)

|   |                 |
|---|-----------------|
| Mounting flange MF20  | Item No. 612562 |
| Mounting kit 2 ( <b>only version VV &amp; AA</b> )  | Item No. 640503 |
| <ul style="list-style-type: none"> <li>• Cable entry M16</li> <li>• Cover screw</li> <li>• 2 Screws (rounded head)</li> </ul>   |                 |
| Mounting kit 3 ( <b>only version 3xV/Relay</b> )  | Item No. 674133 |
| <ul style="list-style-type: none"> <li>• Cable entry M20</li> <li>• seal insert for double cable entry 2x 6 mm</li> <li>• Cover screw</li> <li>• 2 Screws (rounded head)</li> </ul> |                 |

## Accessories (optional)

|   |                 |
|---|-----------------|
| Bluetooth dongle  | Item No. 668262 |
| Cable entry M25 USE white, sealing insert 4x Ø=7 mm (4 pcs) | Item No. 641364 |
| Mounting base   | Item No. 631228 |
| Filter stainless steel, wire mesh                           | Item No. 231169 |

### M16 Sealing inserts cable entry (packaging unit 10 pcs.)

| for wire with Ø | 3 mm   | 5 mm   | 7 mm   | 8 mm   |
|-----------------|--------|--------|--------|--------|
| Item No         | 641036 | 641012 | 639248 | 641340 |

### M20 Sealing inserts cable entry (packaging unit 10 pcs.)

| for wire with Ø | 2x6 mm | 2x7 mm | 6 mm   | 8 mm   |
|-----------------|--------|--------|--------|--------|
| Item No         | 641319 | 641333 | 641074 | 641081 |