

AKF10+ LCD

Duct-/Immersion temperature sensor

thermokon®
HOME OF SENSOR TECHNOLOGY

Datasheet

Subject to technical alteration
Issue date: 10.07.2017



Application

Duct/Immersion sensor for measurement of air temperature and other gaseous mediums for HVAC applications (e.g. supply and exhaust ducts) with pocket $\varnothing=6$ mm. LCD models with RGB background light have a transparent cover. Display configuration and threshold values for color changes can be parameterized via Thermokon USEapp. With the option board relay two-point controllers or a 2-stage 2-point controller for temperature can be realized. Can be used as an immersion temperature sensor combined with a thermowell pocket.

Types Available

Duct/Immersion sensor with Display temperature – active 0..10 V

AKF10+ LCD TRV MultiRange <xx>.06

Duct/Immersion sensor with display temperature – active 4..20 mA

AKF10+ LCD TRA MultiRange <xx>.06

Duct/Immersion sensor with display temperature – active 0..10 V + relay

AKF10+ LCD TRV MultiRange <xx>.06 relay

<xx>: mounting length 50/100/150/200/250/300/450 mm
MultiRange: Measuring ranges adjustable at the transducer

Security Advice – Caution



The installation and assembly of electrical equipment should only be performed by authorized personnel.

The product should only be used for the intended application. Unauthorised modifications are prohibited! The product must not be used in relation with any equipment that in case of a failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

Notes on Disposal



As a component of a large-scale fixed installation, Thermokon products are intended to be used permanently as part of a building or a structure at a pre-defined and dedicated location, hence the Waste Electrical and Electronic Act (WEEE) is not applicable. However, most of the products may contain valuable materials that should be recycled and not disposed of as domestic waste. Please note the relevant regulations for local disposal.

Build-up of Self-Heating by Electrical Dissipative Power

Temperature sensors with electronic components always have a dissipative power, which affects the temperature measurement of the ambient air. The dissipation in active temperature sensors shows a linear increase with rising operating voltage. This dissipative power has to be considered when measuring temperature. In case of a fixed operating voltage ($\pm 0,2$ V) this is normally done by adding or reducing a constant offset value. As Thermokon transducers work with a variable operating voltage, only one operating voltage can be taken into consideration, for reasons of production engineering. Transducers 0..10 V / 4..20 mA have a standard setting at an operating voltage of 24 V =. That means, that at this voltage, the expected measuring error of the output signal will be the least. For other operating voltages, the offset error will be increased by a changing power loss of the sensor electronics. If a re-calibration should become necessary later directly on the sensor, this can be done by means of a trimming potentiometer on the sensor board.


Remark: Occurring draft leads to a better carrying-off of dissipative power at the sensor. Thus temporally limited fluctuations might occur upon temperature measurement.

Technical Data


Measuring values		temperature
Output voltage		0..10 V or 0..5 V, min load 10k Ω (live-zero configuration via Thermokon USEapp)
Output Amp	TRA	4..20 mA, max load 500 Ω
Output switch contact	Relay	2 floating contacts for 24 V ~ or 24 V = / 3 A
Power supply		15..35 V = or 19..29 V ~,
	TRA	15..35 V =
Power consumption		max. 2,5 W (24 V =) max. 4,3 VA (24 V ~)
Measuring range temp.		-20..+80 °C (default setting), optionally configured via Thermokon USEapp
Accuracy temperature		$\pm 0,5$ K (typ. at 21 °C)
Display		LCD 29x35 mm with RGB backlight
Enclosure		enclosure USE-M, PC, pure white, cover PC, transparent, with removable cable entry
Protection		IP65 according to EN 60529
Cable entry	TRV TA Relay	M16, for wire max. $\varnothing=8$ mm M20, for wire max. $\varnothing=10$ mm, seal insert for double cable entry for wire max. $\varnothing=6$ mm
Connection electrical		removeable plug-in terminal, max. 2,5 mm ²
Pocket		stainless steel V4A, $\varnothing=6$ mm, mounting length: 50 100 150 200 250 300 450 mm
Ambient condition	enclosure	-20..+70 °C, max. 85% rH short term condensation
Mounting		with duct temperature of 90..120 °C mounting flange MF6DS flexible, at 120..260 °C mounting flange MF6 (brass) is recommended

Mounting Advices


The sensor can be mounted on the ventilation duct by means of the mounting flange MF6DS (optional with mounting base).

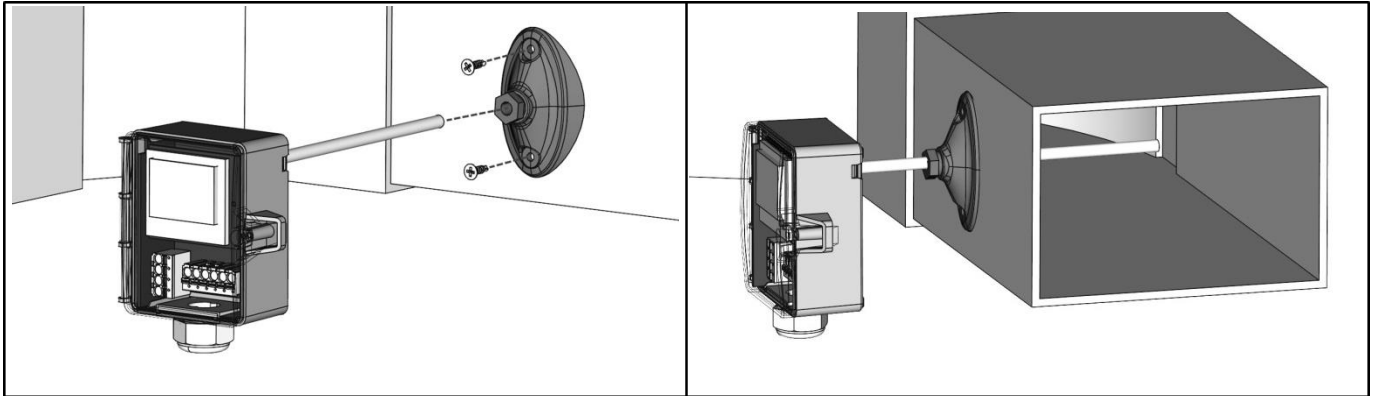

Optional mounting with mounting base (Item No. 631228), please note the installation depth of the sensorpocket.
(permissible ambient temperature $-35..+70\text{ °C}$)

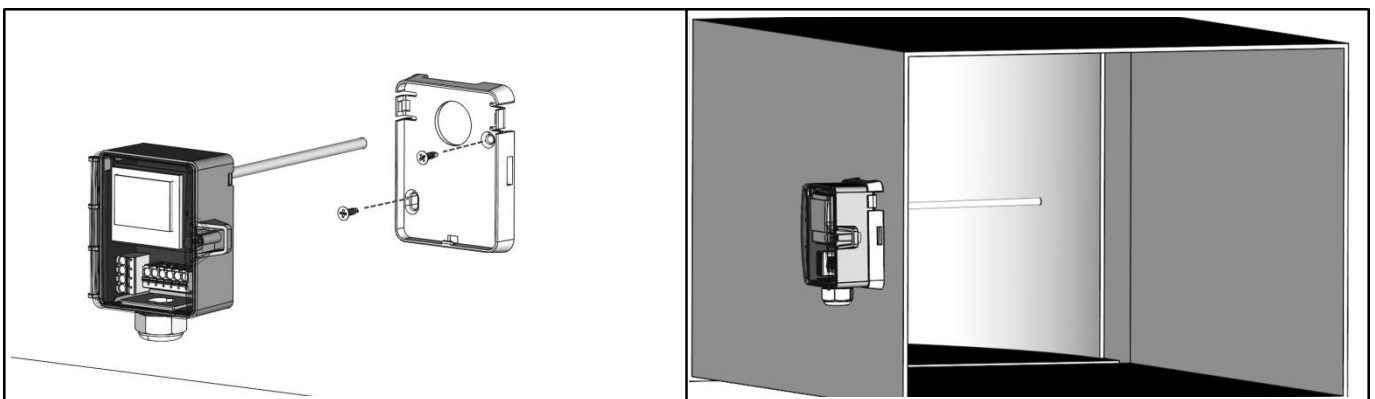


Mounting with immersion pocket or compression fitting for usage in liquid media. Use contact fluid for better heat transfer between sensor and measuring medium.

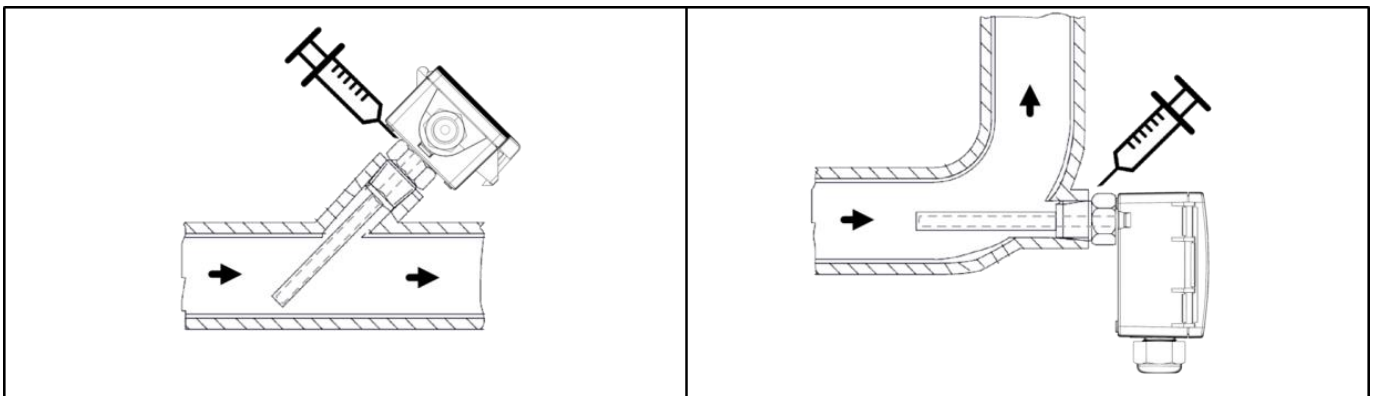


Connection Plan

To change the output voltage range (default 0..10 V to 0..5 V) via jumper, the display must be removed from the board first.


AKF10+ LCD TRV MultiRange

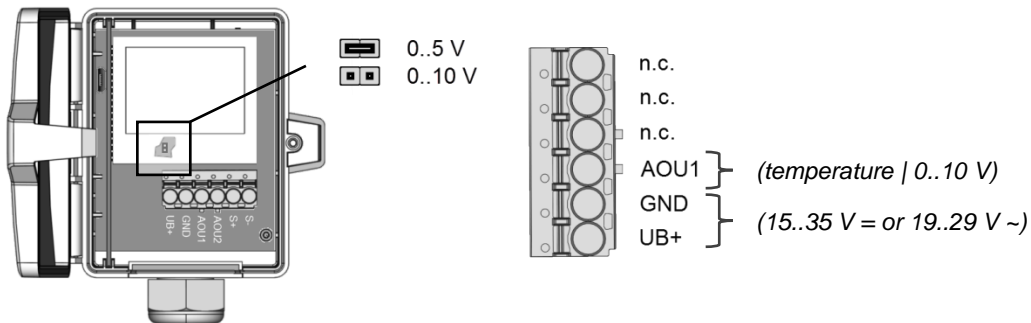


AKF10+ LCD TRA MultiRange

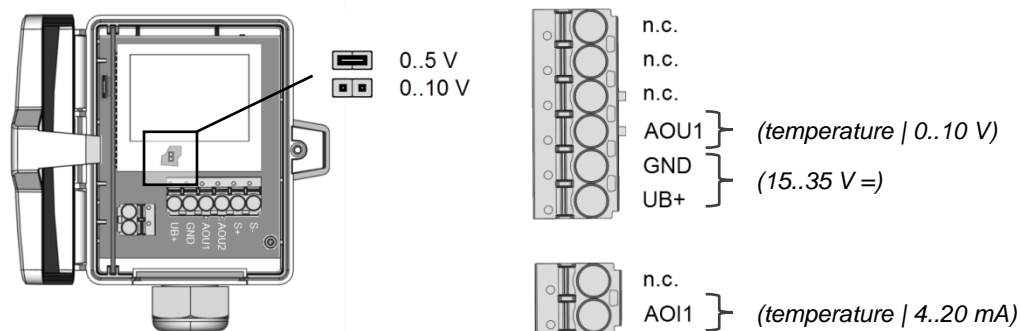

AKF10+ LCD TRV MultiRange Relay

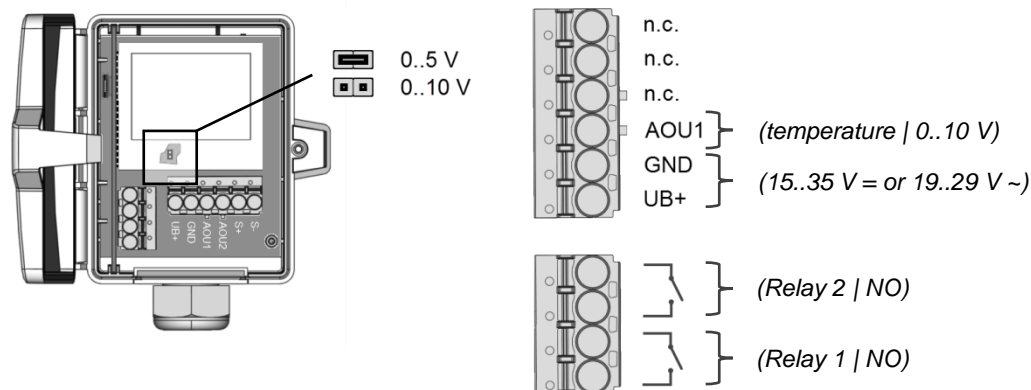

Configuration

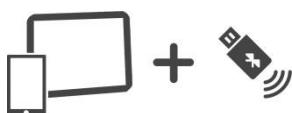

The Thermokon bluetooth dongle with micro-USB is required for communication between USEapp and USE-M / USE L (Item No.: 668262). Commercial bluetooth dongles are not compatible.


Application-specific reconfiguration of the devices can be carried out using the Thermokon USEapp. The configuration is carried out in the voltage-supplied state.



The configuration-app and the app description can be found in the download area of our webpage.

→ [Download \(APK-file for Android\)](#)

Dimensions (mm)

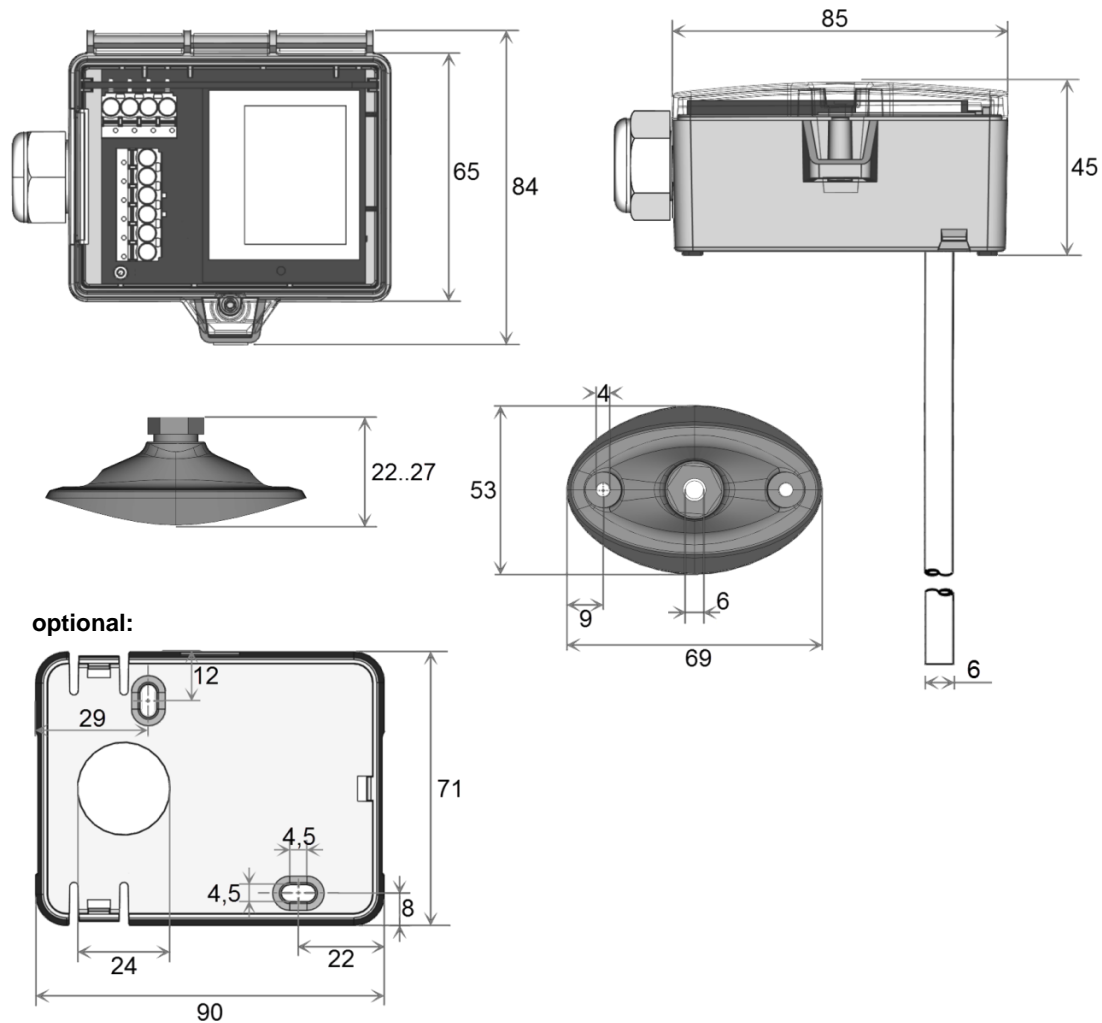

Accessories (included in delivery)

Mounting flange MF6DS	Item No. 669016
Mounting kit 2 (only version TRV & TRA)	Item No. 640503
• Cable entry M16 • Cover screw • 2 Screws (rounded head)	
Mounting kit 3 (only version Relay)	Item No. 674133
• Cable entry M20 • seal insert for double cable entry 2x 6 mm • Cover screw • 2 Screws (rounded head)	

Accessories (optional)

Bluetooth dongle	Item No. 668262
Cable entry M25 USE white, sealing insert 4x Ø=7 mm (4 pcs)	Item No. 641364
Mounting base	Item No. 631228
VA-Compression fitting type KL6VA	Item No. 103213
Mounting flange MF6 (brass)	Item No. 003407

M16 Sealing inserts cable entry (packaging unit 10 pcs.)

for wire with Ø	3 mm	5 mm	7 mm	8 mm
Item No	641036	641012	639248	641340

M20 Sealing inserts cable entry (packaging unit 10 pcs.)

for wire with Ø	2x6 mm	2x7 mm	6 mm	8 mm
Item No	641319	641333	641074	641081

Thermowell pockets stainless steel / brass for sensors with pocket Ø=6 mm

length	50 mm	100 mm	150 mm	200 mm	250 mm	300 mm	450 mm
THMSDS	610995	611008	611015	611022	611763	611039	611046
THVADS	611152	611817	611824	611848	611862	611879	611893

MS-thermowell pocket (brass, suitable up to 16 bar) type THMSDS <xx>.

VA-thermowell pocket (stainless steel, suitable up to 40 bar) type THVADS <xx>.